



FV-300L FOOT VOLUME / EXPRESSION

Owner's Manual


Thank you for purchasing the BOSS FV-300L Foot Volume/Expression Pedal. The FV-300L is a low-impedance stereo foot volume that is ideal for a device of a low output impedance, such as an effect, keyboard, etc. It is equipped with a tuner output jack and can also be used as an expression pedal using the optional stereo cord PCS-33. To make the best use of the FV-300L, please read this owner's manual carefully.

Copyright © 1991 by BOSS CORPORATION
All rights reserved. No part of this publication may be reproduced in any form without the written permission of BOSS CORPORATION.

■ Using the FV-300L as an expression pedal

● CONNECTIONS

* To use the FV-300L as an expression pedal, you will need an optional PCS-33 stereo cable .

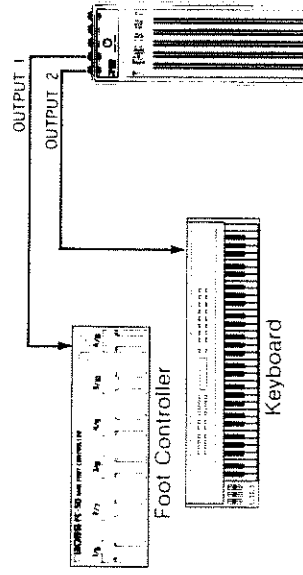

● OPERATION

- 1) Connect the EXP 1 or EXP 2 jack of the FV-300L to the EXP. PEDAL (or EV-5) jack of the instrument you wish to control. (Connection to any other input jack may cause problems.)

*** The FV-300L is similar in design to the Roland EV-5 Expression Pedal and therefore can be connected to the EXP. PEDAL (EV-5) jack on Roland or Boss products.**

- 2) Depress the pedal fully and set the maximum volume on the connected instrument.
- 3) Return the pedal to the minimum position. Set the minimum volume using the MINIMUM VOLUME knob on the pedal.
- 4) Now you can control the volume within the range you have just specified.

■ SPECIFICATIONS


Main Volume (Pedal) × 1
 Minimum Volume (Knob) × 1
 Input (jack) × 2
 Output (EXP) (jack) × 2
 Tuner Out (jack) × 1
 Dimensions : 111(W) × 291(D) × 69(H) mm /
 4 - 3 / 8" (W) × 11 - 1 / 2" (D) × 2 - 3 / 4" (H)
 Weight : 1.0kg / 2.2lbs
 Accessories : Owner's Manual
 Options : Stereo Cable (Stereo→Stereo) PCS-33
 (2.0m × 1, 0.75m × 1)

* Specifications and/or appearance of this product are subject to change without prior notice.

■ Using the FV-300L as a volume pedal

● CONNECTIONS

<Setup with a guitar>

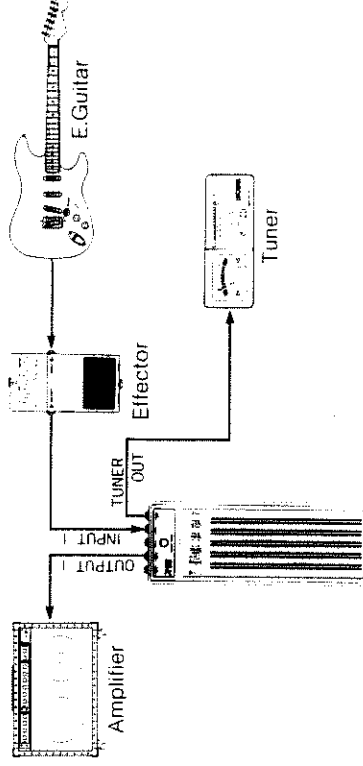


* Because the FV-300L is designed low-impedance, it should be set up with a guitar as shown below; after an effect unit.

● How to use the TUNER OUT jack

Connect the output of a guitar (or keyboard) to INPUT 1 on the FV-300L. Connect a tuning device to the TUNER OUT jack. (The signal from INPUT 2 cannot be sent to the TUNER OUT jack.) If you return the pedal to the minimum position, you can now tune the instrument without any sound from the amplifier. (In this case, set the MINIMUM VOLUME knob to zero.)


<Setup for stereo output>

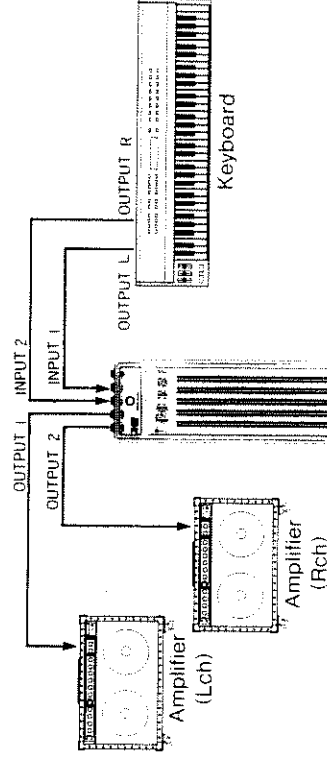

● OPERATION

- 1) Connect the FV-300L to a guitar (or keyboard) and an amplifier as shown above.
- 2) With the pedal fully depressed, set the maximum volume level by adjusting the volume on the guitar (or keyboard) and amplifier.
- 3) Return the pedal to the minimum position. Set the minimum

<Setup with two keyboards>

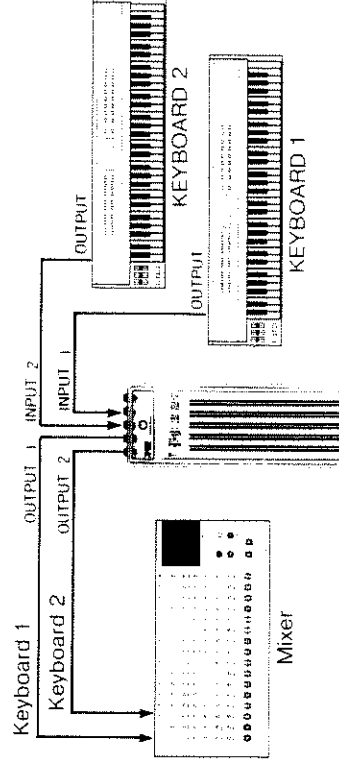

volume level using the MINIMUM VOLUME knob on the pedal. (The maximum volume level cannot be changed with the MINIMUM VOLUME knob.)

- 4) Now you can control the volume within the range you have just specified.

■ IMPORTANT NOTES

- Do not subject the unit to temperature extremes (eg. direct sunlight in an enclosed vehicle). Avoid using or storing the unit in dusty or humid areas or areas that are subject to high vibration levels.
- For everyday cleaning, wipe the unit with a soft, dry cloth (or one that has been slightly dampened with water). To remove stubborn dirt, use a mild neutral detergent. Afterwards, be sure to wipe the unit thoroughly with a soft, dry cloth.
- Never use benzene, thinners, alcohol or solvents of any kind, to avoid the risk of discoloration and/or deformation.
- Protect the unit from strong impact.
- Do not allow objects or liquids of any kind to penetrate the unit. In the event of such an occurrence, discontinue use immediately. Contact qualified service personnel as soon as possible.
- Should a malfunction occur (or if you suspect there is a problem) discontinue use immediately. Contact qualified service personnel as soon as possible.

 Roland®

G6017220

UPC

G6017220



19951



Products of Roland

Printed in Taiwan '91 - 10 - B3-1Y